




*Where technology meets innovation*

## **TDP-S25/SC25/SW25** DLP DATA PROJECTOR



**1800 ANSI Lumens**  
**DLP Display Technology**  
**2000:1 Contrast**  
**SVGA Graphics**  
**Wireless capable (TDP-SW25)**  
**Document Camera (TDP-SC25)**

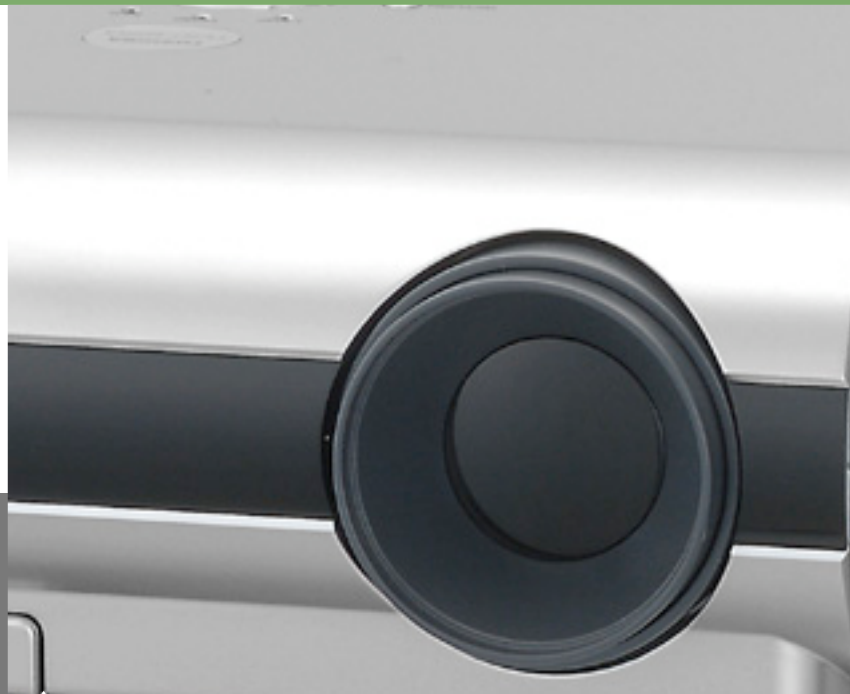


**TOSHIBA**  
Image is everything™

# TDP-S25/SC25/SW25

## SPECIFICATIONS

### Quality Presentations at a Very Competitive Price.

This entry level Toshiba unit is low on price but high on Value. It offers features which are usually only found on much higher priced units. Standard features on the TDP-S25 projector are keystone correction, optical zoom lens, variety of connectivity including 2 15 pin computer inputs, monitor output plus S-Video and Composite Video. The TDP-SC25 also features document camera capabilities, displaying 3-D products, literature and photos.

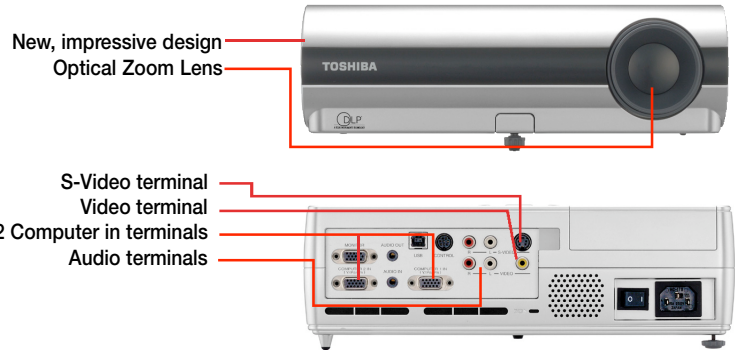

| Model Device                   | Display technology<br>resolution<br>number of pixels<br>Lens<br>F/f (mm)<br>Light Source (low mode) | TDP-S25 / TDP-SC25 / TDP-SW25                   |                               |                           |
|--------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------|---------------------------|
| Operating Temperature          |                                                                                                     | 0.55" DMD                                       |                               |                           |
| Lamp life                      |                                                                                                     | 800 x 600 4:3 SVGA Panel                        |                               |                           |
| Brightness (lm)                |                                                                                                     | 480,000                                         |                               |                           |
| Contrast ratio                 |                                                                                                     | 1.2x manual focus/manual zoom                   |                               |                           |
| Operation Noise                |                                                                                                     | F=2.0-2.2, f=18.2mm-21.84mm                     |                               |                           |
| Projection Distance            |                                                                                                     | 160W (135W)                                     |                               |                           |
| Scanning Frequency             |                                                                                                     | 5 to 35 deg C                                   |                               |                           |
| Input Terminal                 |                                                                                                     | up to 3000 hours                                |                               |                           |
| Output Terminal                |                                                                                                     | 1800                                            |                               |                           |
| Other Terminal                 |                                                                                                     | 2000:1                                          |                               |                           |
| Input Signal                   |                                                                                                     | 36dB                                            |                               |                           |
| Keystone Correction            |                                                                                                     | 33dB                                            |                               |                           |
| Auto Set                       |                                                                                                     | 100 inches / 3.3m                               |                               |                           |
| Speaker                        |                                                                                                     | 15-93kHz                                        |                               |                           |
| Model Name of replacement Lamp |                                                                                                     | 50-85Hz                                         |                               |                           |
|                                |                                                                                                     | x 2: D-sub15 Terminal                           |                               |                           |
|                                |                                                                                                     | x 1: D-sub15 terminal (Common with RGB input)   |                               |                           |
|                                |                                                                                                     | x 1: S terminal                                 |                               |                           |
|                                |                                                                                                     | x 1: RCA terminal                               |                               |                           |
|                                |                                                                                                     | x 1: Stereo Mini jack                           |                               |                           |
|                                |                                                                                                     | x 2: RCA x 2 (L/R)                              |                               |                           |
|                                |                                                                                                     | x 1: D-sub15 terminal                           |                               |                           |
|                                |                                                                                                     | x 1: Stereo Mini jack (Variable audio out)      |                               |                           |
|                                |                                                                                                     | RS232C (Mini DIN8 pin)                          |                               |                           |
|                                |                                                                                                     | for service use only                            |                               |                           |
|                                |                                                                                                     | NTSC, PAL, SECAM                                |                               |                           |
|                                |                                                                                                     | 480i, 480p, 576i, 576p, 1080i, 720p             |                               |                           |
|                                |                                                                                                     | VGA, SVGA (True) / XGA, SXGA, UXGA (Compressed) |                               |                           |
|                                |                                                                                                     | Manual, Vertical 15 degree each Up/Down         |                               |                           |
|                                |                                                                                                     | Yes                                             |                               |                           |
|                                |                                                                                                     | 1W monaural                                     |                               |                           |
| Model                          |                                                                                                     | TDP-S25                                         | TDP-SC25                      | TDP-SW25                  |
| Weight                         | Wireless 80211B                                                                                     | No                                              | No                            | Yes                       |
| Size                           | PC Card                                                                                             | No                                              | No                            | Yes                       |
| Power Consumption              | Projection Camera                                                                                   | No                                              | Yes                           | No                        |
| Power Source                   | lbs                                                                                                 | 6.61                                            | 8.6                           | 6.8                       |
| Remote Control keys            | Inches                                                                                              | W 11 2/8 x D 10 x H 3 7/8                       | W 14 4/8 x D 10 2/8 x H 3 7/8 | W 11 2/8 x D 10 x H 3 7/8 |
| Others                         | W                                                                                                   | W230                                            | 230                           | 240                       |
| Accessories                    | V                                                                                                   | 100-240 (50/60Hz)                               | 100-240 (50/60Hz)             | 100-240 (50/60Hz)         |
|                                | Yes                                                                                                 | Simple                                          | Simple                        | Simple with 0 to 9        |
|                                | Carry Bag                                                                                           | Yes                                             | Yes                           | Yes                       |
|                                | 80211B Card                                                                                         | No                                              | No                            | Yes                       |
|                                | User's Manual (CD-ROM)                                                                              | Yes                                             | Yes                           | Yes                       |
|                                | Quick Manual                                                                                        | Yes                                             | Yes                           | Yes                       |
|                                | RGB Cable (3m)                                                                                      | Yes                                             | Yes                           | Yes                       |
|                                | RGB Cable (0.2m)                                                                                    | No                                              | Yes                           | No                        |

Distributed by:

# TOSHIBA

191 McNabb Street,  
Markham, Ont. Canada L3R 8H2

www.toshiba.ca